



Material:

Housing: High Temperature Plastic UL94V-0.
 Contacts: Phosphor Bronze.
 Spring: Stainless steel.
 Lockers: Stainless steel.
 Shell: Stainless steel.
 Slide: High Temperature Plastic UL94V-0.

Electrical Characteristics:

Current Rating: 0.5 AMP.
 Dielectric Withstanding Voltage: AC 500V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 40mΩ max. at DC 100mA.
 Operating Temperature: -25°C ~ +85°C.

*** RoHS Compliant**

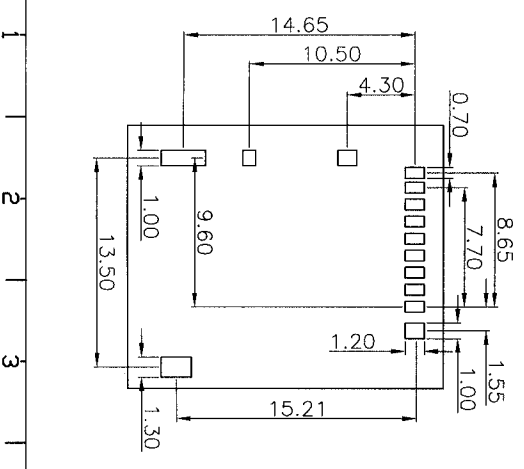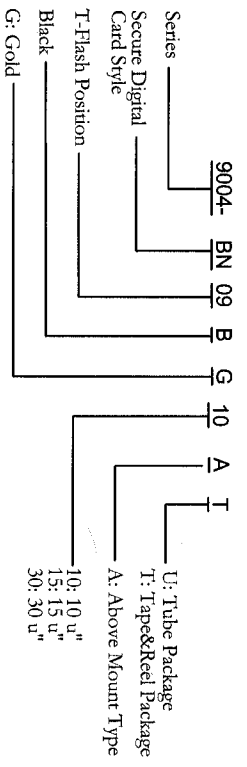

Tolerances		Drawn No.		Title:	
x = ±0.5		9004-00000-010		9004 Series	
xx = ±0.25				Secure Digital Card Connector	
xxx = ±0.15				Push Push Type	
	Projection		Scale	SHEET	P/N:
	mm	1:1		1/1	9004-BN09BGxxxAX
	Drawn By	Scale	Ver. No.	Ver. No.	AG
	GUO XZ05/24'10				

USA Tel: +1 561 744 9986 | Fax: +1 561 744 9935 | email: usasales@alphamicro.net
 UK Tel: +44 (0)1256 851770 | Fax: +44 (0)1256 851771 | email: sales@alphamicro.net

www.alphamicro.net