

Titan X1

GPS/Glonass Module with Antenna

Track with GlobalTop

Quality

Innovation

Customization

Longevity

Product Features

Receiver Type	MT3333 Engine			
Frequency Bands	GPS L1, GLONASS L1, QZSS L1, BEIDOU B1, GALILEO E1, SBAS L1			
Channels	Acquisition	Tracking	PRN	
	99	33	210	
DGPS (SBAS)	USA	EU	Japan	India
	WAAS	EGNOS	MSAS	GAGAN
Positioning Accuracy	Typical	<3.0m		
	SBAS	<2.5m		
	RTCM	TBA		
Velocity Accuracy	0.05 m/s (with SBAS) 0.10 m/s (without SBAS)			
Timing Accuracy (1PPS)	±10 ns RMS (100 ms pulse-width)			
Maximum Altitude	80000 m (Default : 10000 m)			
Maximum Velocity	515 m/s (1000 Knots)			
Maximum Acceleration	4G			
Anti-Jamming	Active CW detection and removal, 12 multi-tone interference canceler			
AGPS	EPO in flash™, 7 or 14 days ephemeris			
EASY™	Self-generated orbit prediction			
AlwaysLocate™	Intelligent periodic mode algorithm			
LOCUS™	Internal data logger, up to 16 hours at 15s intervals (default setting)			
Built-In Components	TCXO, RTC Crystal, Additional LNA, SMPS, SAW Filter, Embedded Flash, Ex-Ant Circuit			
Embedded Antenna	12 x 12 mm GPS/Glonass Patch			
External Antenna	Active only			

Sensitivity

TTFF (time-to-first-fix)	With EASY™	Without EASY™
Hot Start	1 Second	1 Second
Warm Start	5 Seconds	33 Seconds
Cold Start	15 Seconds	35 Seconds
Sensitivity		
Tracking	-165 dBm	
Acquisition	-148 dBm (Cold Start)	
Re-acquisition	-163 dBm (Hot Start)	

Interfaces


Serial Interfaces	UART, SPI, I ² C, RTCM
Max. Baud Rate	115200 bps (Default : 9600 bps)
Max. Update Rate	10 Hz (Default : 1 Hz)
Digital I/O	1 PPS
Protocols	NMEA Standard NMEA Secure (binary, ASCII)

Legal Notice

GlobalTop reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. The information contained herein is provided "as is". No warranty, either express or implied, is made in relation to the accuracy, reliability and fitness for a particular purpose or content of this document. This document may be revised by GlobalTop at any time. For most recent documents, visit www.gtop-tech.com.
Copyright © 2017, GlobalTop Technology Inc.

Dimensions

24-PAD QFN Package	12.5 x 12.5 x 6.8 mm
Weight	< 4 g
Pinout	

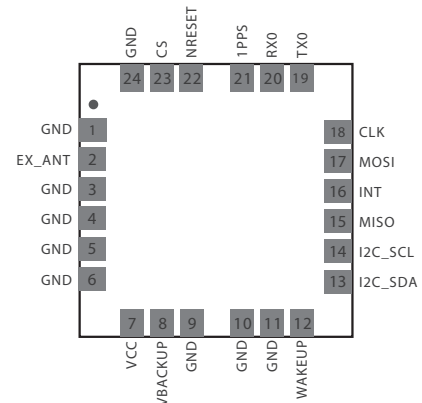

Electrical Data

Supply Voltage	3.0V to 4.3V (Typical 3.3V)		
Backup Supply	2.0V to 4.3V (Typical 3.0V)		
Power Consumption	Min	Typical	Max
Acquisition	20 mA	27 mA	30 mA
Power Tracking	20 mA	25 mA	35 mA
(GLP)Low-Power Tracking	TBA	TBA	TBA
Power Saving (Periodic)			
Backup Mode	1.2 mA (Typical)		
Standby Mode	1.5 mA (Typical)		

Environmental Data and Approvals

Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Approvals & Compliance	CE, FCC, ROHS, REACH, E911
Manufactured at ISO 9001:2008, ISO/TS 16949 certified facility	

Free Firmware Customization

Basic Functions

Default Baud-Rate
NMEA Sentence Interval
Datum (222 Selections)
DGPS Mode
Update Rate
Data digits after decimal
3D Fix Settings
1PPS Duration, Output
Interference Canceler

Advanced Functions

NMEA Secure (ASCII, Binary)
Custom NMEA Output
Last Position Retention
Magnetic Variation
Geo-fencing
Distance Calculation
Navigation Mode
Advanced Altitude
Data Logger Customization



GlobalTop Technology Inc.
No. 16, Nan-Ke 9th Road, Science-based
Industrial Park,
Tainan 741, Taiwan

Contact us :
Email sales@gtop-tech.com
Tel +886 6 5051268
Fax +886 6 5053381

Follow us :
www.gtop-tech.com/linkedin
www.gtop-tech.com/facebook
www.gtop-tech.com/twitter